


T-Pad 1500

Thermally Conductive Pad

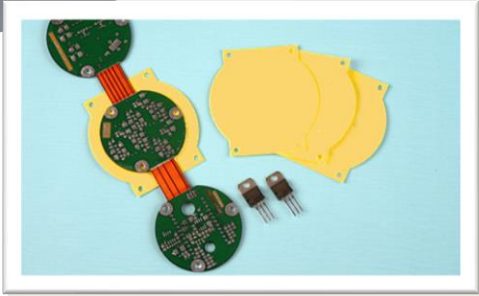

T-pad 1500 is a highly durable pad, formulated to thermally connect hot electronic devices to a cold wall or nearby metal work whilst also maintaining electrical insulation. The cold flow action of **T-Pad 1500** and its soft surfaces on both sides, deliver a good thermal wet out between mating surfaces, this obviates micro air voids for reduced thermal resistance and improved thermal performance. **T-Pad 1500** can be supplied in die-cut shapes for use in a wide range of electronic applications.

Features

- Electrically insulating and moderate thermal performance properties
- Thermal conductivity = 1.5 W/mK
- Requires mounting pressure via spring, metal clip or clamp

Availability

- Standard thickness of 0.23mm & 0.18mm
- Available as custom die-cut shapes and standard sheet sizes of 300mm x 1000mm
- Available in roll format to specified width, custom shape adhesive parts can also be supplied on rolls
- Low tack adhesive can be coated on one side

Benefits

- Guaranteed electrical isolation
- Fills micro air voids between device and mating metal work at the interface. Improving thermal performance
- Maintains temperature stability over a wide range of temperatures

Recommended Uses

- Any heat generating surface to metal that requires good thermal performance and electrical insulation
- Cooling power devices mounted to a heatsink or chassis in PSUs
- Thermally coupling TO220 and TO247 devices to heatsinks

Typical Physical Properties

Property (unit)	Test Method	T-Pad 1500
Colour	Visual	Yellow / Grey (Depending on thickness)
Thermal Conductivity (W/mK)	ASTM D5470	1.5
Hardness (Shore 00)	ASTM D2240	70
Thermal Impedance (K-cm ² /W @ 69KPa)	ASTM D5470	2.90
Operating Temp. (°C)	-	-40 to +200
Flame Rating	UL94	V-0

Electrical and Mechanical Information

Property (unit)	Test Method	T-Pad 1500
Tensile Strength (N/mm)	ASTM D412	20
Elongation (%)	ASTM D412	10
Breakdown Voltage (Volts AC)	ASTM D149	>6000
Volume Resistivity (Ω-cm)	ASTM D257	2.0 x 10 ¹³



www.universal-science.com
UK  +44 (0) 1908 222 211

IT  +39 (02) 395 613 61 FR  +33 (0) 1602 00276



This material is often used in these industries:



Information furnished by Universal Science regarding technical data is believed to be accurate and reliable but our customers bear the responsibility in assessing fitness for purpose. Universal Science makes no warranties as to the fitness, merchantability or suitability of any materials or products for any uses. Universal Science shall not be liable for damages of any kind. Universal Science terms and conditions of sale apply.